

Compact RT Scissor Lifts

Snorkel



- Working height up to 39ft. 2in.
- Lightweight and excellent ground clearance
- 4 wheel drive
- Large platform area with 4ft. deck extension
- 4 hydraulic outriggers with level sensor
- Foam filled, high grip tires

SR2770

SR3370

SR2770/3370 scissor lifts specifications

	SR2770	SR3370
max. working height	33ft.9in.	39ft.2in.
max. platform height A	26ft.10in.	33ft.1in.
max. drive height	26ft.10in.	33ft.1in.
platform capacity (SWL)	1280lb.	990lb.
platform size (deck extended)	99.3in x 66in	99.3in x 66in
deck extension	4ft.	4ft.
overall width B	5ft. 8in.	5ft. 9in.
overall length C	11ft.	11ft.
lowered height D	8ft.2in.	8ft.10in.
min. height (guardrails folded)	5ft.8in.	6ft.6in.
gross weight	6,272lb.	7,964lb.
inside turning radius	9ft. 3in.	7ft.8in.
outside turning radius	15ft.1in.	15ft 6in.
max. drive speed (lowered)	2.8mph.	2.8mph.
ground clearance	13.8in.	13.8in.
gradeability	35%	35%
tires	27 x 10.5 x15 foam filled	27 x 10.5 x15 foam filled
drive system	4 wheel drive	
controls	joystick proportional	
power source	Kubota V-905 water cooled diesel 22.5hp	


DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine. Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

standard features

- 4ft. roll-out deck extension
- 4 wheel drive
- 4 hydraulic outriggers with level sensor
- Proportional controls
- Foam filled lug tires
- Articulating axle
- Driveable at full height
- Operator horn
- Drive motion alarm
- Lower warning alarm
- Fold-down guardrails
- 1 year parts and labor warranty
- 5 years structural warranty

options

- 110/240VAC GFCI power to platform
- Flashing beacon
- Lanyard attachment
- No stabilizers
- Non-marking tires

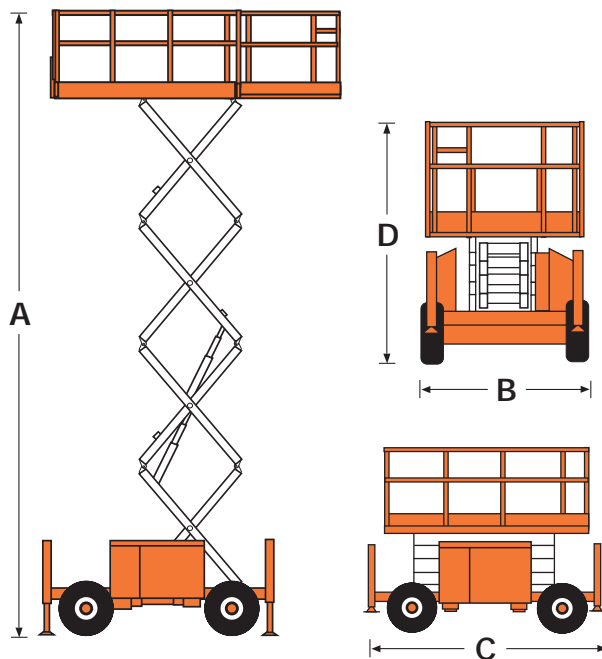

BP1: SR2770/3370 USA 11/08



Snorkel PO Box 1160, St. Joseph, MO 64502-1160, USA
 Tel: +1 (785) 989-3000 Toll Free: +1 (800) 255-0317
 Sales fax: +1 (785) 989-3070 Parts fax: +1 (785) 989-3077
www.snorkelusa.com

Meets or exceeds applicable requirements of OSHA, ANSI A92.5-2006 and CSA B354.4-02

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
Snorkel
 INTERNATIONAL